



# JDD New Energy Products Introduction


SHENZHEN JDDTECH NEW MATERIAL CO.,LTD

- P1 Home page
- P2 Catalogue
- P3 Application category of sleeving
- P4 The application and characteristics of new energy sleeving



## **New energy protection sleeving**

- P5 New energy protection sleeving
- P6 New energy protection sleeving production process
- P7-9 FR1105 ( Orange braided sleeving )
- P10-12 SCS2165 ( Orange self-closing wrap )
- P13-16 SCS2160D ( Double layer self-closing wrap )
- P17-19 LG3215 ( PA orange corrugate flexible conduit )
- P20-22 LG3305 ( PP orange corrugate flexible conduit )
- P23-24 FR1145 EMI ( EMI shielding braided sleeving )

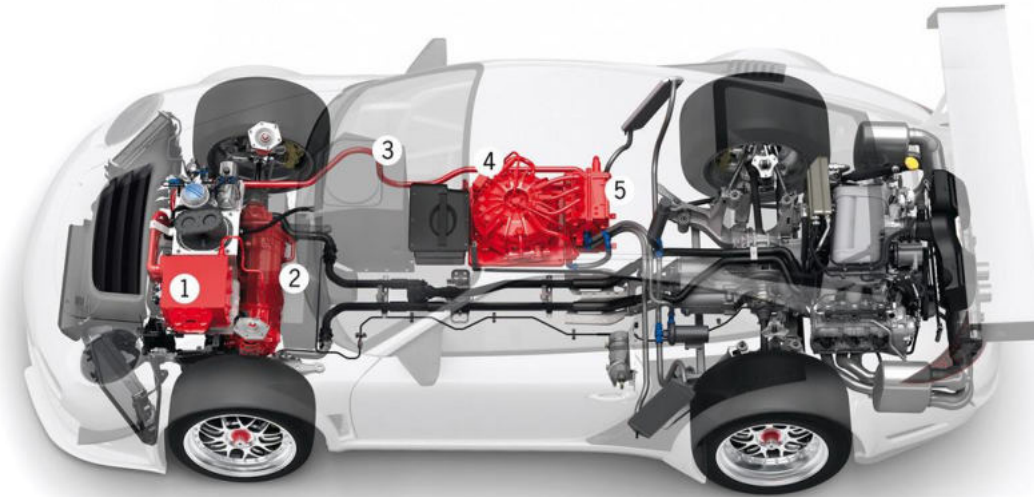

Abrasion resistance  
sleeving



Flame retardant  
sleeving



Electromagnetic shielding  
protection sleeving



New energy protection  
sleeving ( high voltage  
resistance )

## The application of new energy protection sleeving

The application of new energy wiring harness requires wear-resistant and impact-resistant components

Wiring harnesses, hoses, rigid tubes, cables






Customized low cost solution

Ideal substitute for aluminum corrugated conduite, metal tape and metal heat insulation board

## Characteristics and advantages

- With excellent impact resistance, abrasion resistance, widely used for automotive wire harness, abrasion resistance of hoses and impact protection
- Easy to install, with tubular, self-closing and other structural
- Operating temperature up to 150°C
- Flammability, environmental protection and halogen-free

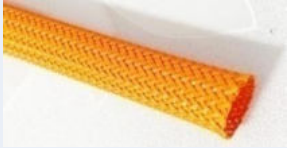

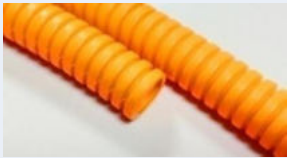SN	Product Name	JDD Model	Product pictures	Temperature Class	T1
1	Orange braided sleeving	FR1105		150°C	HG
2	Orange self-closing wrap	SCS2165		150°C	Aptiv
3	Double layer self-closing wrap	SCS2165D		150°C	Aptiv
4	Orange corrugated flexible conduit	PP : LG3305 PA : LG3215		PP : 125°C PA : 150°C	YA DA
5	EMI shielding braided sleeving ( PET+tinned copper )	FR1510 EMI		150°C	YU TONG

Product process of new energy textile sleeving

PET raw material slice and multifilament  
Global unified raw material supply

Master material modification and core  
spinning technology  
Mechanical property

Rolling  
Tension control

High-speed textile machine  
Width:8-200mm

Molding  
Temperature

Hot cut  
Automatic feeding

First article inspection, random inspection,  
shipment inspection, annual inspection  
Perfect quality control system

Customize packages  
Custom labels

Product process of extrusion type new energy sleeving

PP/PA slice  
Global unified raw material supply

Master the core technology of material  
modification  
Material property

Dry  
Temperature

Continuous extrusion  
Dimensions and appearance

Automatic cutting  
Automatic feeding

First article inspection, random inspection,  
shipment inspection, annual inspection  
Perfect quality control system

Customize packages  
Custom labels

**Product composition and characteristics**

- ◆ Made of high performance PET monofilament, halogen-free, no harmful substances
- ◆ Operating temperature-40°C-150°C
- ◆ Excellent abrasion resistance and heat resistance
- ◆ Closed design, expandable to 3 times its own diameter , easy to install
- ◆ Norminal range : 2-60mm

**Application**

- ◆ Wire harness, rubber hose

**Application OEM:** BYD、BAIC BJEV、




### Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Long-term thermal aging	ISO188 GMW14327	150°C/504H After the constant temperature test, treat it for 16 hours under the conditions of 23±2°C and 50±5% RH; at a constant speed, once every 10 seconds, wind the sample on a mandrel with a diameter equal to four times the nominal diameter of the sample for testing, and confirm that the sample is not cracked or brittle Phenomenon.	No cracking or embrittlement
	SAE J2192	150°C/3000H constant temperature test, every 500h test, take out 5 samples from the oven and treat them at 23±2°C and 50±5%RH for 4 hours; at a constant speed, wrap the samples around every 10 seconds Test on a mandrel with a diameter equal to four times the nominal diameter of the sample to confirm whether the sample has embrittlement or fracture	No embrittlement or fracture
Accelerated thermal aging	ISO 188-B	After the constant temperature test at 175°C/240 H, the samples were treated at 23±2°C and 50± 5% RH for 16 hours. At a constant rate of one turn every 10 seconds, the sample is wound on the mandle-axis with a diameter equal to four times the nominal diameter of the sample to verify whether the sample has brittle crack or fracture phenomenon	No embrittlement or fracture

## Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Abrasion resistance	ISO6722-1	Load 7N, 0.4mm piano wire, 13mm core rod, and determine the abrasion resistance level according to the OEM standard	GMW14327 ≥4 Class ( 10000 )
	SAE ARP 1536B	Load 11N,13mm metal grinding head,13mm mandrel, according to the OEM standard to determine the abrasion grade	≥3 Class ( 20000 )
Liquid resistance	GMW14327	Put the product in contact with the liquid in the automobile engine room for 5 minutes at room temperature, and then wrap it on a 4-fold mandrel after 20 minutes. Observe that the sample does not crack or delamination	No cracking and delamination
Flammability	UL94	V0 Class	Pass
	FMV SS302	< 100 mm/min	self-extinguishing
Low temperature flexibility	SAE J2192	After - 40 °C / 4 h testing, keep the same testing environment winding the test sample 360° on a 4 times diameter( on the basis of sample diameter) mandrel,every 10 s winding a circle, visual check samples no cracking or degradation, no delamination of adhesive	No cracking and delamination



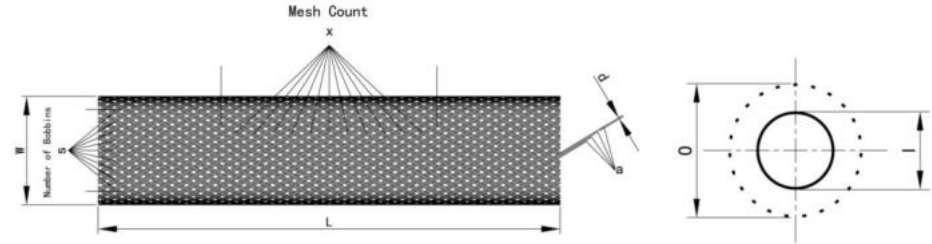


## Product Dimensions

Model	Flat width ( W )		Expanded range		Packaging ( L ) m/roll
	inch	mm	Min. ( I )	Max. ( O )	
003	1/8 "	3	1	6	1000
006	1/4"	6	3	9	500
008	5/16"	8	5	12	350
010	3/8"	10	7	17	350
012	1/2"	12	8	20	300
016	5/8"	16	10	27	250
019	3/4"	19	14	30	200
025	1"	25	18	33	200
032	1-1/4"	32	20	50	150
038	1-1/2"	38	30	60	100
045	1-3/4"	45	35	75	100
050	2"	50	40	80	100
064	2-1/2"	64	45	105	100
076	3"	76	64	120	100

**Product composition and characteristics**

- ◆ It is woven from polyester monofilament and polyester multifilament in warp and weft direction, environmentally friendly and halogen-free.
- ◆ Operating temperature -40°C-150°C
- ◆ Lightweight, dust-proof, wear-resistant, orange unique design is easy to identify high pressure
- ◆ Open structure design is easy to install.
- ◆ ID : 5-38mm , overlap 25%

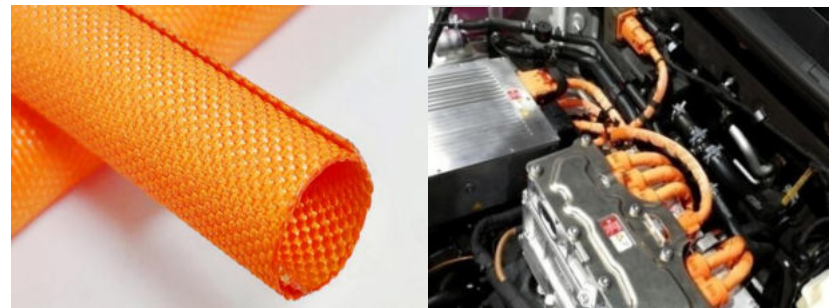**Application**


- ◆ Automotive wiring harness terminals, connectors, etc.
- ◆ Application OEM:VOLVO、GAC、BYD、CATL、JONHON、SAIC、Nissan

**Performance benchmarking and data**

Test items	Standard	Test method/judgment result	JDD test result
Long-term thermal aging	ISO188 GMW14327	150°C/504H After the constant temperature test, treat it for 16 hours under the conditions of 23±2°C and 50±5% RH; at a constant speed, once every 10 seconds, wind the sample on a mandrel with a diameter equal to four times the nominal diameter of the sample for testing, and confirm that the sample is not cracked or brittle Phenomenon.	No cracking or embrittlement
	SAE J2192	150°C/3000H constant temperature test, every 500h test, take out 5 samples from the oven and treat them at 23±2°C and 50±5%RH for 4 hours; at a constant speed, wrap the samples around every 10 seconds Test on a mandrel with a diameter equal to four times the nominal diameter of the sample to confirm whether the sample has embrittlement or fracture;	No embrittlement or fracture
Accelerated thermal aging	ISO 188	After the constant temperature test at 175°C/240 H, the samples were treated at 23±2°C and 50± 5% RH for 16 hours.At a constant rate of one turn every 10 seconds, the sample is wound on the mandle-axis with a diameter equal to four times the nominal diameter of the sample to verify whether the sample has brittle crack or fracture phenomenon	No embrittlement or fracture

## Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Abrasion resistance	ISO6722-1	Load 7N, 0.4mm piano wire, 13mm core rod, and determine the abrasion resistance level according to the OEM standard	GMW14327 ≥3Class ( 3000 )
	SAE ARP 1536B	Load 11N,13mm metal grinding head,13mm mandrel, according to the OEM standard to determine the abrasion grade	≥3 Class ( 200000 )
Liquid resistance	GMW14327	Put the product in contact with the liquid in the automobile engine room for 5 minutes at room temperature, and then wrap it on a 4-fold mandrel after 20 minutes. Observe that the sample does not crack or delamination	No cracking and delamination
Flammability	UL94	V0 Class	Pass
	FMV SS302	< 100 mm/min	self-extinguishing
Low temperature flexibility	SAE J2192	After - 40 °C / 4 h testing, keep the same testing environment winding the test sample 360° on a 4 times diameter( on the basis of sample diameter) mandrel,every 10 s winding a circle, visual check samples no cracking or degradation, no delamination of adhesive	No cracking and delamination

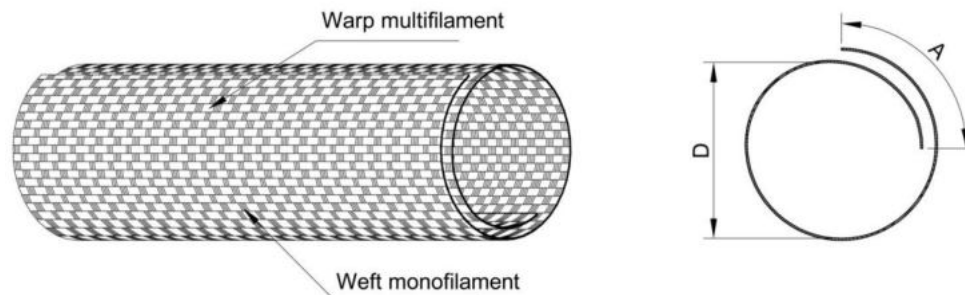

## Product size specification

P/N	ID D(mm)	Expanded width☆(mm)	Max bundle dia (mm)	Overlap A ( ° )
SCS2165-005	5	25±4	6	90°+40°/-25°
SCS2165-008	8	40±4	9	
SCS2165-010	10	45±4	11	
SCS2165-013	13	60±6	14	
SCS2165-016	16	70±6	17	
SCS2165-019	19	85±6	20	90°±20°
SCS2165-025	25	105±8	26	
SCS2165-029	29	120±8	30	
SCS2165-032	32	135±8	33	
SCS2165-038	38	160±8	40	


**Product composition and features**

- ◆ Made of polyester monofilament and polyester multi-filaments and woven in the direction of warp and weft, environment-friendly and halogen-free.
- ◆ Operating temperature: -40°C to 150°C.
- ◆ With excellent impact resistance, abrasion resistance, widely used for automotive wiring harness,
- ◆ Abrasion resistance and impact resistance protection for rubber hose.
- ◆ The structural design of the opening is easy to install.
- ◆ Inside diameter : 8-32mm , overlap:25%

**Typical applications**

- ◆ Automotive wire harness terminal ,splice

**Application OEM:** VOLVO、 Dongfeng Nissan, GAC

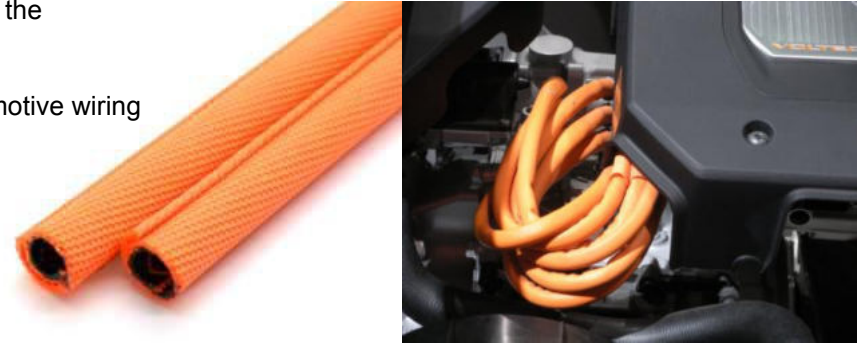**Performance benchmarking and data**


Test Items	Test Standard	Test Methods/Determination Result	JDD Test Result
Long term heat ageing	ISO188 GMW14327	After constant temperature test at 150°C for 504H, it is conditioned at 23±2°C and 50±5% RH for 16 hours. At a uniform speed of one turn per 10 seconds, the sample is wrapped around a mandrel whose diameter equal to 4 times the nominal diameter of the sample. Check the sample any signs of cracking or embrittlement.	No embrittlement, no cracking
	SAE J2192	150°C/3000H constant temperature test, every 500h test, take out 5 samples from the oven and treat them at 23±2°C and 50±5%RH for 4 hours; at a constant speed, wrap the samples around every 10 seconds Test on a mandrel with a diameter equal to four times the nominal diameter of the sample to confirm whether the sample has embrittlement or fracture	No embrittlement, no cracking

## Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Accelerated thermal aging	ISO 188	After the constant temperature test at 175°C/240 H, the samples were treated at 23±2°C and 50± 5% RH for 16 hours. At a constant rate of one turn every 10 seconds, the sample is wound on the mandle-axis with a diameter equal to four times the nominal diameter of the sample to verify whether the sample has brittle crack or fracture phenomenon	No embrittlement or fracture
Abrasion resistance	ISO6722-1	Load 7N, 0.4mm piano wire, 13mm core rod, and determine the abrasion resistance level according to the OEM standard	GMW14327 ≥8 Class (200000)
	SAE ARP 1536B	Load 11N, 13mm metal grinding head, 13mm mandrel, according to the OEM standard to determine the abrasion grade	≥E Class ( 1 million )
Drop test	LV312-3	Single wire	E (50 J) No short circuit > 10 ms
		Shielded wire	C (15 J) No short circuit > 10 ms

## Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Impact resistance	LV312-3	At room temperature 23°C , 1500g impact , No visual cracks or damages allowed	PASS
	LV312-3	At low temperature -40°C , 700g impact , No visual cracks or damages allowed	PASS
Fluid Resistance	GMW14327	Put the product in contact with the liquid in the automobile engine room for 5 minutes at room temperature, and then wrap it on a 4-fold mandrel after 20 minutes. Observe that the sample does not crack or delamination	No cracking and delamination
Flabmmability	UL94	Class V0	Pass
	FMV SS302	< 100 mm/min	Self-extinguish
Low temperature flexibility	SAE J2192	After - 40 °C / 4 h testing, keep the same testing environment winding the test sample 360° on a 4 times diameter( on the basis of sample diameter) mandrel, every 10 s winding a circle, visual check samples no cracking or degradation, no delamination of adhesive	No cracking and delamination

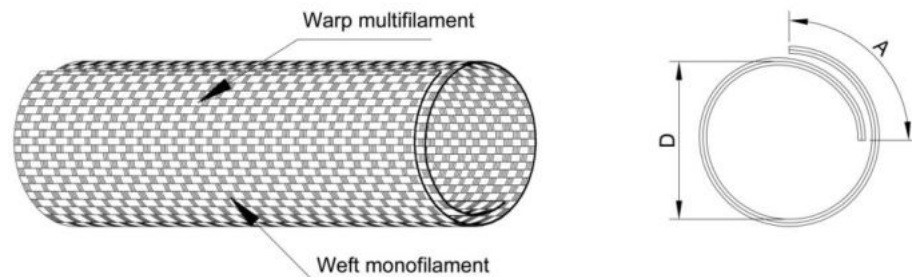

## Product Dimensions

Model	Nominal inside diameter D (mm)	Function inside diameter D (mm)	Wall Thickness (mm)	Overlap ( ° )
SCS2169D-08	8	6 ~ 8	2.0±0.25	90+45/-25
SCS2169D-10	10	8-10		90+45/-25
SCS2169D-13	13	10-14		90+45/-25
SCS2169D-16	16	14-17		90+45/-25
SCS2169D-19	19	17-19		90±20
SCS2169D-25	25	19-25		90±20
SCS2169D-29	29	25-29		90±20



**Product composition and features**


- ◆ Extruded by PA material, molding, environmental protection, halogen-free, no hazardous substances.
- ◆ Working temperature:-40°C to 150°C
- ◆ Flexibility, bendability , acid resistance, abrasion resistance.
- ◆ Protect wiring harness, wires,cables, etc.
- ◆ Inside diameter : 4.8-48mm

**Typical Application**

- ◆ Wire harnesses,mechanical,electronic


**Application Performance**

- ◆ Honda, JONHON, Changan, BAIC, SAIC, Yutong

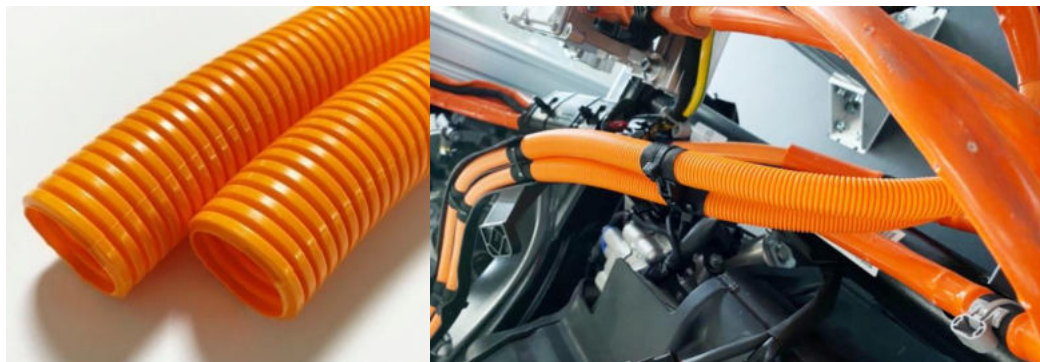**Performance benchmarking and data**

Test items	Standard	Test method/judgment result	JDD test result
Long term heat ageing	ISO188 GMW14327	After 150°C/3000H constant temperature test, treat at 23±2°C and 50±5%RH for 4 hours; wind the sample on a mandrel with a diameter equal to four times the nominal diameter of the sample every 10 seconds at a constant speed Test to confirm that the sample has no cracking or embrittlement phenomenon;	No cracking or embrittlement
	QC/T29106	After 150°C/3000 H constant temperature test, confirm whether the sample has embrittlement or fracture	No embrittlement or fracture
Accelerated heat ageing	QC/T29106	After the constant temperature test at 175°C/240 H, the appearance of the sample is confirmed to be brittle or fractured	No embrittlement or fracture

Test items	Standard	Test method/judgment result	JDD test result
Abrasion Resistance	ISO6722-1	Sandpaper abrasion: load 0.63N, 150J sandpaper belt, confirm the stroke of the sandpaper belt when the sample is worn out	> 2800mm
		Needle grinding Scrape abrasion: load 7N, 0.4mm piano wire, 13mm mandrel, rotate 45 degrees, confirm the wear resistance level according to the host standard	GMW14327 ≥6Class (50000)
Liquid resistance	GMW14327	Put the product in contact with the liquid in the automobile engine room for 5 minutes at room temperature, and then wrap it on a 4-fold mandrel after 20 minutes. Observe that the sample does not crack or delamination	No cracking and delamination
Flammability	UL94&GB / T2408	Class V0	Pass
	FMV SS302	< 100 mm/min	Self-extinguish
Low temperature flexibility	QC/T29106	After testing the hollow corrugated flexible conduit at -40°C/4H, wind it on a 4-fold mandrel and observe that the sample has no cracking or delamination	No cracking and delamination
Low temperature impact	QC/T29106	Fill up to 75% of the corrugated flexible conduit sample assembly with PVC wire. After testing at -40°C/4H, under the condition of -40°C, 300g steel balls fall freely from a height of 100mm to impact the sample assembly, and observe whether the sample is cracked or broken	No cracks or breaks

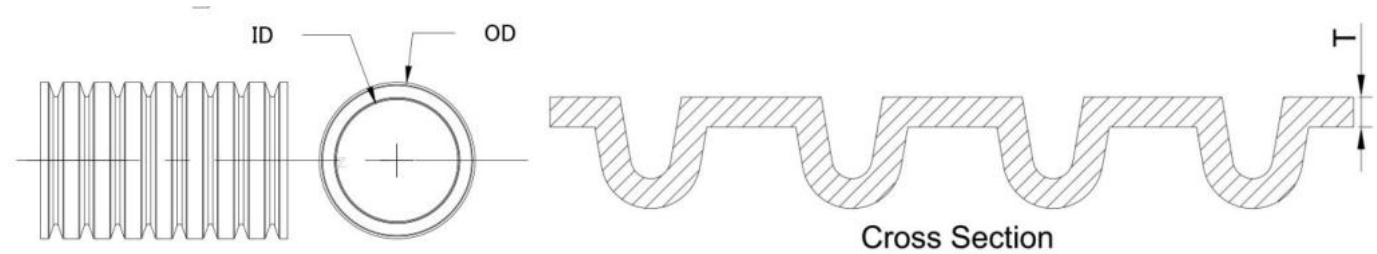

## Product dimensions

Model	Inside diameter (ID)mm	Outside diameter ( OD)mm	Wall Thickness ( T ) mm	Packaging ( M/Roll )
Φ5	5.5±0.3	8.5±0.3	0.25±0.05	200
Φ7	7.0±0.3	10.0±0.3	0.27±0.05	200
Φ8	8.5±0.3	11.0±0.3	0.30±0.05	200
Φ10	10.0±0.3	13.0±0.3	0.30±0.05	100
Φ12	12.0±0.4	15.8±0.4	0.30±0.05	100
Φ14	14.5±0.4	18.5±0.4	0.32±0.05	100
Φ17	17.0±0.4	21.2±0.4	0.32±0.05	100
Φ21	21.0±0.4	25.0±0.4	0.35±0.05	100
Φ23	23.0±0.4	28.5±0.4	0.35±0.05	50
Φ29	29.0±0.4	34.5±0.4	0.40±0.05	50
Φ36	36.0±0.4	42.5±0.4	0.45±0.05	25
Φ48	48.0±0.4	54.5±0.4	0.50±0.05	25

**Product composition and characteristics**

- ◆ Extrusion from PP material, molding, environmental protection, halogen-free, no hazardous substances.
- ◆ Working Temperature : -40°C to 125°C
- ◆ Flexibility, bendability, acid resistance, abrasion resistance.
- ◆ Protect wire harness, wire ,cables
- ◆ Inside Diameter : 4.8-48mm

**Typical Application**

- ◆ Wire harness, mechanical, electronics.

**Application performance**


- ◆ Honda, CATL, Yutong, CRRC, JONHON

**Performance benchmarking and data**

Test items	Standard	Test method/judgment result	JDD test result
Long term heat ageing	ISO188 GMW15926	After 125°C/3000H constant temperature test, treat at 23±2°C and 50±5%RH for 4 hours; wind the sample on a mandrel with a diameter equal to four times the nominal diameter of the sample at a constant speed every 10 seconds Test to confirm that the sample has no cracking or embrittlement phenomenon;	No cracking or embrittlement
	QC/T29106	After 125°C/3000 H constant temperature test, confirm whether the sample has embrittlement or fracture	No embrittlement or fracture
Accelerated heat ageing	QC/T29106	After the constant temperature test at 150°C/240 H, the appearance of the sample is confirmed to be brittle or fractured	No embrittlement or fracture

## Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Abrasion Resistance	ISO6722-1	Sandpaper abrasion: load 0.63N, 150J sandpaper belt, confirm the stroke of the sandpaper belt when the sample is worn out	> 2000mm
		Needle grinding Scrape abrasion: load 7N, 0.4mm piano wire, 13mm mandrel, rotate 45 degrees, confirm the wear resistance level according to the host standard	GMW14327 ≥5Class (15000)
Fluid Resistance	GMW14327	Put the product in contact with the liquid in the automobile engine room for 5 minutes at room temperature, and then wrap it on a 4-fold mandrel after 20 minutes. Observe that the sample does not crack or delamination	No signs of cracking or delamination
Flammability	UL94&GB / T2408	Class V0	Pass
	FMV SS302	< 100 mm/min	Self-extinguish
Cold flexibility	QC/T29106	After testing the hollow corrugated flexible conduit at -40°C/4H, wind it on a 4-fold mandrel and observe that the sample has no cracking or delamination	No signs of cracking or delamination .
Low temperature impact	QC/T29106	Fill up to 75% of the corrugated flexible conduit sample assembly with PVC wire. After testing at -40°C/4H, under the condition of -40°C, 300g steel balls fall freely from a height of 100mm to impact the sample assembly, and observe whether the sample is cracked or broken	No signs of cracking or delamination

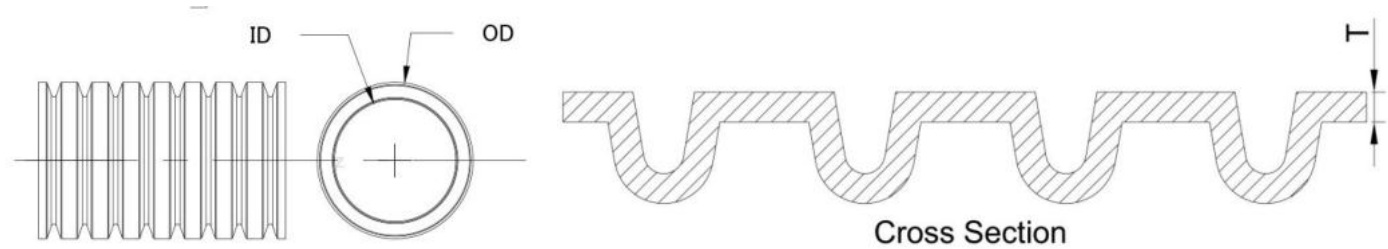

### Product Dimensions

Model	Inside Diameter(ID)mm	Outside Diameter ( OD)mm	Wall Thickness ( T ) mm	Packaging ( M/Roll )
Φ5	5.5±0.3	8.5±0.3	0.25±0.05	200
Φ7	7.0±0.3	10.0±0.3	0.27±0.05	200
Φ8	8.5±0.3	11.0±0.3	0.30±0.05	200
Φ10	10.0±0.3	13.0±0.3	0.30±0.05	100
Φ12	12.0±0.4	15.8±0.4	0.30±0.05	100
Φ14	14.5±0.4	18.5±0.4	0.32±0.05	100
Φ17	17.0±0.4	21.2±0.4	0.32±0.05	100
Φ21	21.0±0.4	25.0±0.4	0.35±0.05	100
Φ23	23.0±0.4	28.5±0.4	0.35±0.05	50
Φ29	29.0±0.4	34.5±0.4	0.40±0.05	50
Φ36	36.0±0.4	42.5±0.4	0.45±0.05	25
Φ48	48.0±0.4	54.5±0.4	0.50±0.05	25

**Product composition and characteristics**

- ◆ Braided of tinned copper wire + orange PET monofilament.
- ◆ Working temperature :-40°C to 150°C.
- ◆ Excellent shielding effectiveness and conductivity.
- ◆ Easy to install , flexibility,high temperature resistance,chemical resistance,good cold and hot impact and son on.
- ◆ Inside diameter : 3-64mm
- ◆ **Typical Application**
- ◆ Automotive wire harness
- ◆ **Application performance**
- ◆ BYD, Yutong

**Performance benchmarking and data**

Test items	Standard	Test method/judgment result	JDD test result
Long-term thermal aging	SAE J2192	150°C/3000H constant temperature test, every 500h test, take out 5 samples from the oven and treat them at 23±2°C and 50±5%RH for 4 hours; at a constant speed, wrap the samples around every 10 seconds Test on a mandrel with a diameter equal to four times the nominal diameter of the sample to confirm whether the sample has embrittlement or fracture	No embrittlement or fracture
Accelerated heat ageing	ISO 188 method B	After the constant temperature test at 175°C/240 H, the samples were treated at 23±2°C and 50± 5% RH for 16 hours.At a constant rate of one turn every 10 seconds, the sample is wound on the mandle-axis with a diameter equal to four times the nominal diameter of the sample to verify whether the sample has brittle crack or fracture phenomenon	No embrittlement or fracture

## Performance benchmarking and data

Test items	Standard	Test method/judgment result	JDD test result
Salt spray test	IEC-60068-2-52	Salt solution concentration:50±5g/l NaCl , the temperature in test chamber is 35±2°C. After circular test per standard required condition, the sample has no sign of corrosion.	PASS
Shielding effectiveness	GB/T 30142	Plane material shielding effectiveness detection, 30MHZ~1GHZ frequency band detection, results are for reference	90dB~50dB
Chemical Resistance	SAE J2192	After testing with liquids such as engine oil, gasoline, ethanol, diesel, power steering fluid, automobile transmission fluid, engine coolant, brake fluid, battery acid, urea solution, etc., there is no embrittlement, fracture, or other forms of degradation or loss of flexibility	PASS
Low temperature flexibility	SAE J2192	After - 40 °C / 4 h testing, keep the same testing environment winding the test sample 360°on a 4 times diameter( on the basis of sample diameter) mandrel,every 10 s winding a circle, visual check samples no cracking or degradation, no delamination of adhesive	No cracking and delamination



# THANK YOU

More information please check: [www.jddtech.com.cn](http://www.jddtech.com.cn)



[www.jddtech.com.cn](http://www.jddtech.com.cn)



[www.jddtech.com](http://www.jddtech.com)